
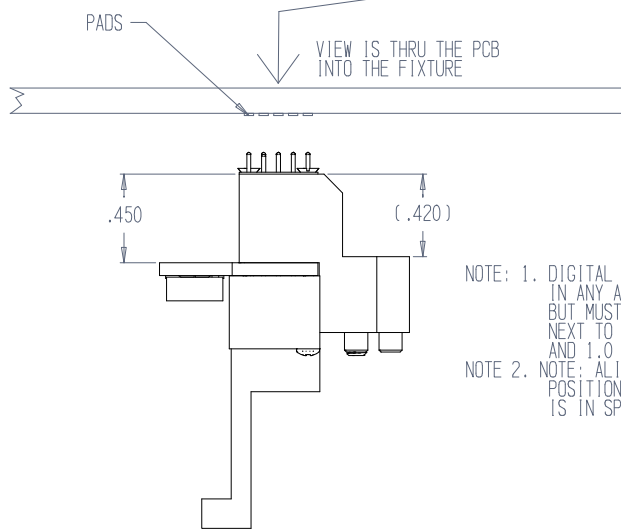


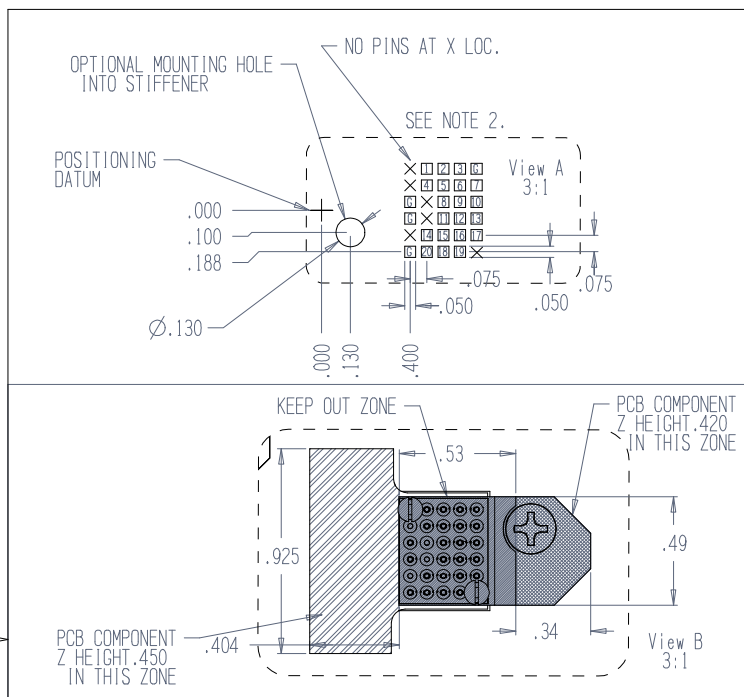


NOTE: 1. DIGITAL LAUNCHES CAN BE PLACED IN ANY AVAILABLE PAD POSITION BUT MUST BE SPACED 1.50" WHEN PLACING NEXT TO EACH OTHER AND 1.0 FROM OTHER BLOCKS

NOTE 2. NOTE: ALIGNMENT HOLE DIMENSIONS ARE FOR POSITION REFERENCE ONLY. ALIGNMENT HOLE TOL IS IN SPECIFIC PCB DIMENSIONED DRAWING.

↑

TESTER

See View A

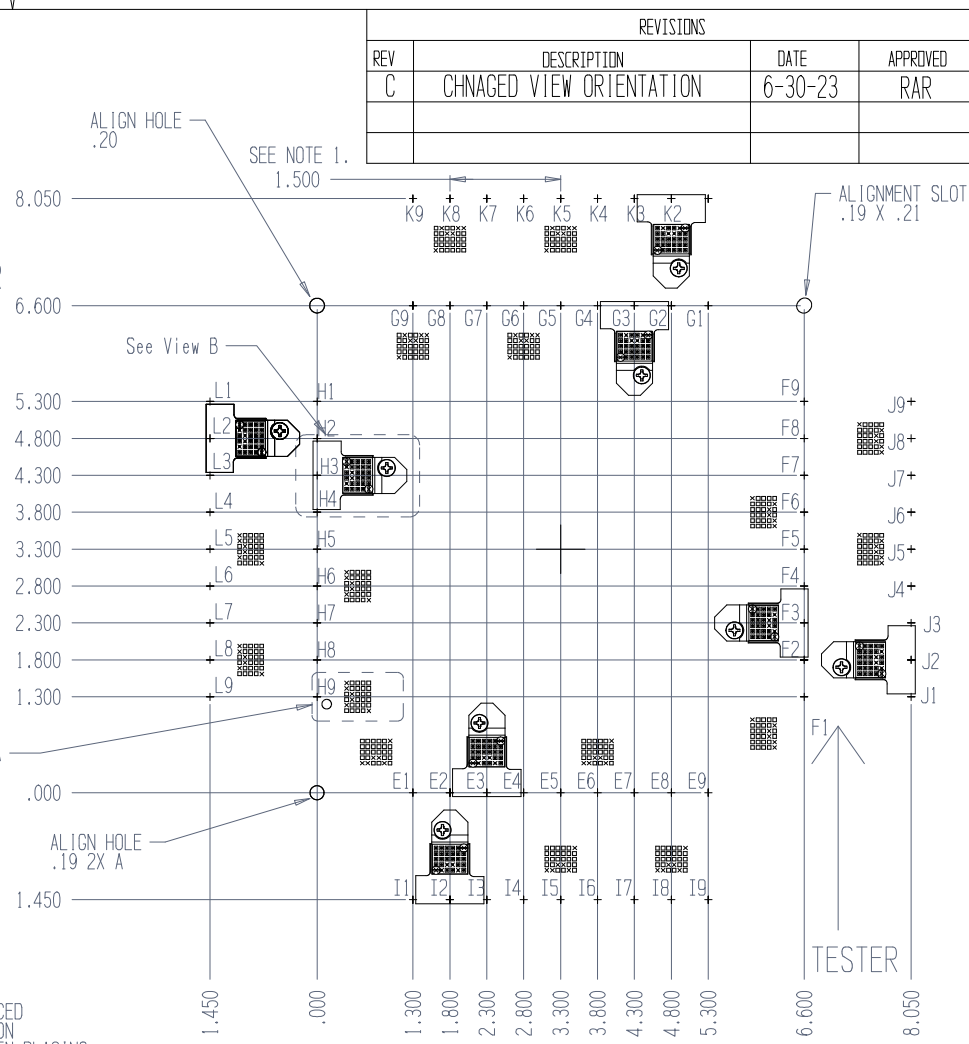

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	CHANGED VIEW ORIENTATION	6-30-23	RAR

TOLERANCE:
 .XX ±.01
 .XXX ±.005

ALL DIMS IN INCHES

Roos Instruments

DIGITAL PAD LOCATIONS

THIRD ANGLE PROJECTION

RI CONFIDENTIAL AND PRIVILEGED INFORMATION SHEET 1 OF 1